
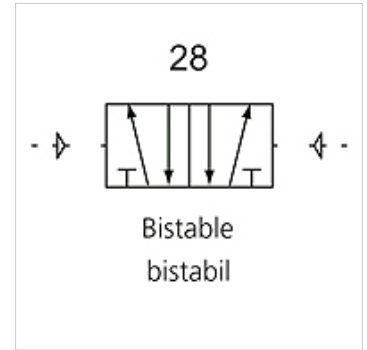


K-WV 5/2 BEIDS PNEU

5/2-way spool valves, double pneumatic

Osobine

| | |
|--------------------------------|---|
| Funkcija | 5/2-way |
| Radni pritisak | 2.5 - 10 bar; Max. vacuum 10 bar (external pilot air) |
| min. radni pritisak | 2,5 bar |
| Temperaturni opseg | -10 °C to +60 °C |
| Protok 6bara i 10bara | 1500 NI/min (G 1/4), 4600 NI/min (G 1/2) |
| Priključak na električnu mrežu | Coupler plug PG 9 - form B |
| Vrsta zaštite | IP 65 (DIN 46244) |
| Kućište | Anodised aluminium, blue |
| Klipni razvodnik | Stainless steel |
| Zaptivni materijal | NBR |



Napomena

Ostali podaci na upit.

Opis

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

Artikal

| Naziv | Priključak | DN | Broj plana uključivanja | Upravljanje |
|----------------|------------|----|-------------------------|-------------|
| K- 07 15 02 19 | G 1/4 | 8 | 28 | |
| K- 07 15 02 20 | G 1/2" | 15 | 28 | |