


K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA FLEX

Osobine

Mediji	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Radni pritisak	Max. 10 bar
Pritisak reagovanja	0,6 bar (Ø 20 bis Ø 32), 0,4 bar (Ø 40 bis Ø 100)
Temperaturni opseg	-10 °C to +60 °C (Ø 20 to Ø 63) -10 °C to +80 °C (Ø 80 bis Ø 100)
Klipnjača	C45 steel, hard chrome-plated
Cev	Anodised aluminium jacket with T-slots
Klipovi	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 100)
Zaptivni materijal	NBR

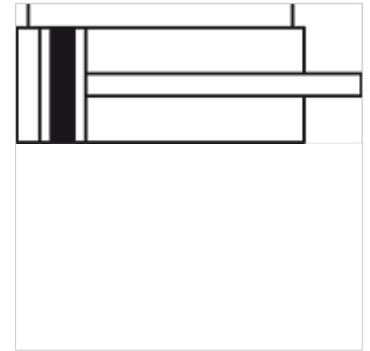

Napomena

Ostali podaci na upit.

Opis

New series acc. to ISO 21287 characterised by a very short and compact design. The standard type features a magnetic piston. Piston rod optionally with male or female thread.

Artikal

Naziv	Ø klipa	Hod (mm)	Priključak	Spoljni navoj klipnjače
K- 07 15 08 09	20 mm	5	M 5	M 8
K- 07 15 08 10	20 mm	10	M 5	M 8
K- 07 15 08 11	20 mm	15	M 5	M 8
K- 07 15 08 12	20 mm	20	M 5	M 8
K- 07 15 08 13	20 mm	25	M 5	M 8
K- 07 15 08 14	20 mm	30	M 5	M 8
K- 07 15 08 15	20 mm	40	M 5	M 8
K- 07 15 08 16	20 mm	50	M 5	M 8
K- 07 15 08 17	20 mm	60	M 5	M 8
K- 07 15 08 18	25 mm	5	M 5	M 8
K- 07 15 08 19	25 mm	10	M 5	M 8
K- 07 15 08 20	25 mm	15	M 5	M 8
K- 07 15 08 21	25 mm	20	M 5	M 8
K- 07 15 08 22	25 mm	25	M 5	M 8
K- 07 15 08 23	25 mm	30	M 5	M 8
K- 07 15 08 24	25 mm	40	M 5	M 8
K- 07 15 08 25	25 mm	50	M 5	M 8
K- 07 15 08 26	25 mm	60	M 5	M 8
K- 07 15 08 27	32 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 28	32 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 29	32 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 30	32 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 31	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 32	32 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 33	32 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 34	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 35	32 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 36	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 37	40 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 38	40 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 39	40 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 40	40 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 41	40 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 42	40 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 43	40 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 44	40 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 45	40 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 46	40 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 47	50 mm	5	G 1/8	M 12 x 1.25

K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA FLEX

Artikel				
Naziv	Ø klipa	Hod (mm)	Priključak	Spoljni navoj klipnjače
K- 07 15 08 48	50 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 49	50 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 50	50 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 51	50 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 52	50 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 53	50 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 54	50 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 55	50 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 56	50 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 57	63 mm	5	G 1/8	M 12 x 1.25
K- 07 15 08 58	63 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 59	63 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 60	63 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 61	63 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 62	63 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 63	63 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 64	63 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 65	63 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 66	63 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 67	80 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 68	80 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 69	80 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 70	80 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 71	80 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 72	80 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 73	80 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 74	80 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 75	80 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 76	80 mm	80	G 1/8	M 16 x 1.5
K- 07 15 07 99	100 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 00	100 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 01	100 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 02	100 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 03	100 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 04	100 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 05	100 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 06	100 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 07	100 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 08	100 mm	80	G 1/8	M 16 x 1.5