


K-DRUCKLUFTBEHAELTER

Compressed air tanks

HANSA FLEX

Osobine

| | |
|--------------------|-------------------------------|
| Radni pritisak | max. 11 bar |
| Temperaturni opseg | -10 °C to +60 °C |
| Materijal | steel (FeP04), plastic coated |

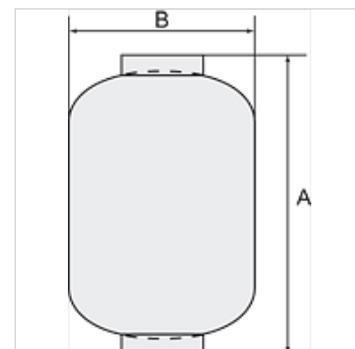

Napomena

Ostali podaci na upit.

Opis

Compact steel tanks in accordance with EU Directive 97/23

Artikal

| Naziv | Sadržaj (L) | Priključak | A (mm) | B |
|----------------|-------------|------------------|--------|----------|
| K- 07 25 17 94 | 1,0 | 2 x G 1/2 female | 225,0 | 85,0 mm |
| K- 07 25 17 95 | 2,5 | 2 x G 1/2 female | 170,0 | 160,0 mm |
| K- 07 25 17 96 | 5,0 | 2 x G 1/2 female | 184,0 | 210,0 mm |
| K- 07 25 17 97 | 7,0 | 2 x G 1/2 female | 240,0 | 210,0 mm |
| K- 07 25 17 98 | 12,0 | 2 x G 1/2 female | 365,0 | 229,0 mm |