


# K-T-STECK VERS DRE MINI PAR

Male branch tees, swivel type, mini, parallel thread

**HANSA FLEX**

## Osobine

Radni pritisak	Max. 10 bar, vacuum
Oblast primene	Air, vacuum
preporučena creva	PU or PA (nylon)
Mediji	Komprimovani vazduh
Norma	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Temperaturni opseg	0 °C to +60 °C
Zaptivna površina	O-ring (NBR)
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic

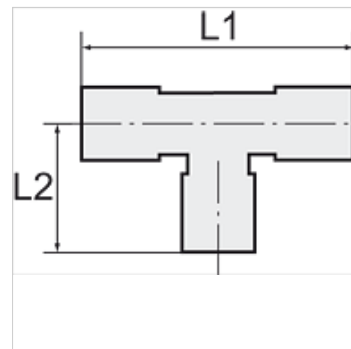

## Napomena

Ostali podaci na upit.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Artikal

Naziv	Navoj	Ø mm za crevo spolja	L1 (mm)	L2 (mm)	SW
K- 07 40 23 04	M 3	3 mm	24,0	16,0	8 mm
K- 07 40 23 05	M 3	4 mm	28,0	17,2	8 mm
K- 07 40 23 06	M 5	3 mm	24,0	16,0	8 mm
K- 07 40 23 07	M 5	4 mm	28,0	17,2	8 mm
K- 07 40 23 08	M 5	6 mm	32,0	18,2	8 mm
K- 07 40 23 09	M 6	3 mm	24,0	16,5	10 mm
K- 07 40 23 10	M 6	4 mm	28,0	17,6	10 mm
K- 07 40 23 11	M 6	6 mm	32,0	18,6	10 mm
K- 07 40 23 12	G 1/8	4 mm	28,0	16,5	14 mm
K- 07 40 23 13	G 1/8	6 mm	32,0	16,5	14 mm
K- 07 40 23 14	R 1/8	4 mm	28,0	18,0	10 mm
K- 07 40 23 15	R 1/8	6 mm	32,0	19,0	10 mm