
K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

Osobine

Ulazni pritisak	Max. 10 bar
Temperaturni opseg	-10 °C to +50 °C
Mediji	Komprimovani vazduh
Vrsta zaštite	IP 65
Radni pritisak	0.5 - 8 bar
Prekidač pritiska	Changeover contact
Širina pora u elementu filtera	20 µm
Merenje vrednosti protoka	At 6,3 bar and Δp = 1 bar



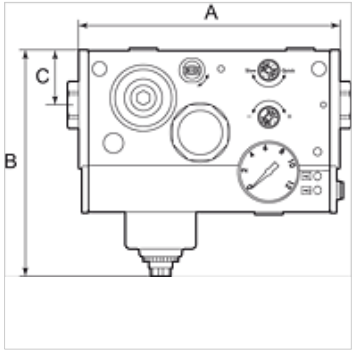

Napomena

Ostali podaci na upit.

Opis

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Napomene u vezi porudžbine

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Artikal

Naziv	Priključak	Protok (L/min)	A (mm)	B	C (mm)	Napon
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.