


K-T-STECK VERS DRE AG-K BE 1

Male branch tees, swivel type, conical male thread, coated

HANSA FLEX

Osobine

| | |
|-------------------|---------------------|
| Radni pritisak | Max. 16 bar |
| Radna temperatura | -20 °C to +150 °C |
| Materijal | Mesing, niklovan |
| Pritisni prsten | Nickel-plated brass |
| Stezni prsten | Stainless steel |

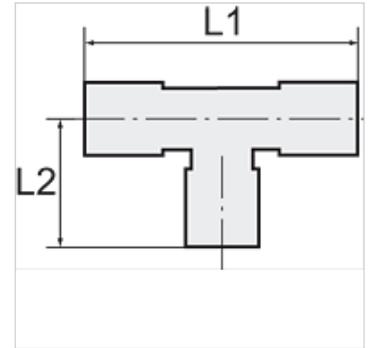

Napomena

Ostali podaci na upit.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikal

| Naziv | Navoj | Ø mm za crevo spolja | L1 (mm) | L2 (mm) | SW |
|----------------|-------|----------------------|---------|---------|-------|
| K- 07 40 28 18 | R 1/8 | 4 mm | 40,0 | 20,0 | 13 mm |
| K- 07 40 28 19 | R 1/8 | 6 mm | 43,0 | 20,0 | 13 mm |
| K- 07 40 28 20 | R 1/8 | 8 mm | 47,0 | 20,0 | 13 mm |
| K- 07 40 28 16 | R 1/4 | 6 mm | 43,0 | 25,0 | 14 mm |
| K- 07 40 28 17 | R 1/4 | 8 mm | 47,0 | 25,0 | 14 mm |
| K- 07 40 28 15 | R 1/4 | 10 mm | 53,0 | 26,0 | 16 mm |
| K- 07 40 28 21 | R 3/8 | 8 mm | 47,0 | 28,0 | 18 mm |
| K- 07 40 48 02 | R 3/8 | 10 mm | 53,0 | 30,0 | 18 mm |
| K- 07 40 48 03 | R 3/8 | 12 mm | 58,0 | 32,5 | 20 mm |
| K- 07 40 48 01 | R 1/2 | 12 mm | 58,0 | 35,5 | 22 mm |