


K-RUNDZYLINDER DOPP O E D

Round cylinders, double acting, magnetic, non-cushioned

HANSA FLEX

Osobine

| | |
|-----------------------------|---|
| Mediji | Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Radni pritisak | Max. 10 bar |
| Pritisak reagovanja | 0,6 bar |
| Temperaturni opseg | -10 °C to +60 °C |
| Konstrukcija | Connection: Aluminium pipe / end caps flanged |
| Klipnjača | Stainless steel 1.4301 (Ø 16), C45 steel, hard chrome-plated (Ø 20 and Ø 25) |
| Cev | Aluminium alloy, anodised |
| Poklopac, dno, vodeća čaura | Technopolymer |
| Zaptivka klipnjače | PU |
| Zaptivka klipa | PU |

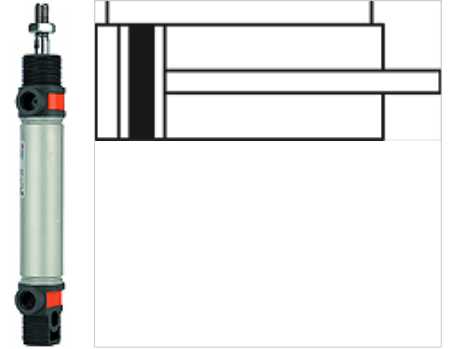

Napomena

Maximum recommended stroke: Ø 16 = stroke 200, Ø 20 and Ø 25 = stroke 500. Longer strokes can result in malfunctions.
Ostali podaci na upit.

Opis

Economy standard version with aluminum pipe and magnet piston.

Dodatne informacije

Important: The scope of supply does not include a connector. Please order separately.

Artikal

| Naziv | Ø klipa | Hod (mm) | Priključak | Spoljni navoj klipnjače |
|----------------|---------|----------|------------|-------------------------|
| K- 07 15 17 62 | 16 mm | 10 | M 5 | M 6 |
| K- 07 15 17 63 | 16 mm | 25 | M 5 | M 6 |
| K- 07 15 17 64 | 16 mm | 50 | M 5 | M 6 |
| K- 07 15 17 65 | 16 mm | 80 | M 5 | M 6 |
| K- 07 15 17 66 | 16 mm | 100 | M 5 | M 6 |
| K- 07 15 17 67 | 16 mm | 125 | M 5 | M 6 |
| K- 07 15 17 68 | 16 mm | 160 | M 5 | M 6 |
| K- 07 15 17 69 | 16 mm | 200 | M 5 | M 6 |
| K- 07 15 17 70 | 20 mm | 10 | G 1/8 | M 8 |
| K- 07 15 17 71 | 20 mm | 25 | G 1/8 | M 8 |
| K- 07 15 17 72 | 20 mm | 50 | G 1/8 | M 8 |
| K- 07 15 17 73 | 20 mm | 80 | G 1/8 | M 8 |
| K- 07 15 17 74 | 20 mm | 100 | G 1/8 | M 8 |
| K- 07 15 17 75 | 20 mm | 125 | G 1/8 | M 8 |
| K- 07 15 17 76 | 20 mm | 160 | G 1/8 | M 8 |
| K- 07 15 17 77 | 20 mm | 200 | G 1/8 | M 8 |
| K- 07 15 17 78 | 20 mm | 250 | G 1/8 | M 8 |
| K- 07 15 17 79 | 20 mm | 500 | G 1/8 | M 8 |
| K- 07 15 17 80 | 25 mm | 10 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 81 | 25 mm | 25 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 82 | 25 mm | 50 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 83 | 25 mm | 80 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 84 | 25 mm | 100 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 85 | 25 mm | 125 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 86 | 25 mm | 160 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 87 | 25 mm | 200 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 88 | 25 mm | 250 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 89 | 25 mm | 500 | G 1/8 | M 10 x 1.25 |

Pribor

| | |
|-------------------------|--------------|
| K-FUSSBEFESTIGUNG 5 | Foot model |
| K-FLANSCHBEFESTIGUNGEN1 | Flange model |



Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.

24.04.2026

HANSA-FLEX AG

www.hansa-flex.com

1

K-RUNDZYLINDER DOPP O E D

Round cylinders, double acting, magnetic, non-cushioned

