


K-WV 5/2 HANDHEBEL RASTEND 4H

5/2-way valve, operated by hand lever, latching

HANSA FLEX

Osobine

| | |
|---------------------------|--|
| Radni pritisak | 0 - 8 bar |
| Temperaturni opseg | -20 °C to +70 °C |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Telo ventila | Aluminium alloy |

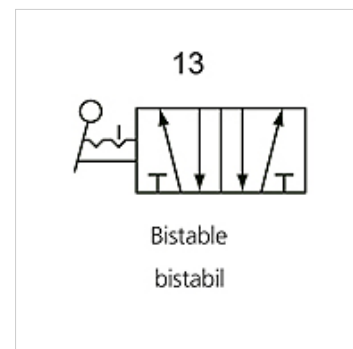

Napomena

Ostali podaci na upit.

Artikal

| Naziv | Priključak izlaza | Priključak ulaza | Priključak za odzračivanje | Protok (L/min) | Broj plana uključivanja | Konstrukciona veličina |
|----------------|-------------------|------------------|----------------------------|----------------|-------------------------|------------------------|
| K- 07 15 02 75 | G 1/8 | G 1/8 | G 1/8 | 750 | 13 | 200 |
| K- 07 15 02 76 | G 1/4 | G 1/4 | G 1/8 | 850 | 13 | 200 |
| K- 07 15 02 77 | G 1/4 | G 1/4 | G 1/4 | 1300 | 13 | 300 |
| K- 07 15 02 78 | G 3/8 | G 3/8 | G 1/4 | 1500 | 13 | 300 |