


# K-WV 3/2 MECHA ROLLENHEB RUECKL M3

3/2-way valve, mechanically operated, with free-return roller lever, NC

**HANSA FLEX**

## Osobine

|                           |  |
|---------------------------|--|
| Radni pritisak            | 0 - 10 bar   |
| Temperaturni opseg        | -20 °C to +70 °C   |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Telo ventila              | Aluminium alloy  |

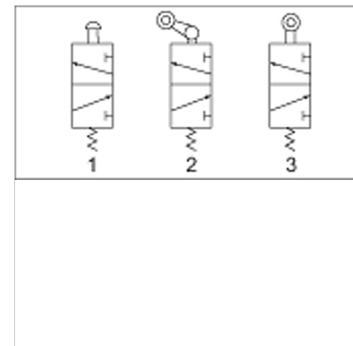

## Napomena

Ostali podaci na upit.

## Artikal

| Naziv          | Priključak | Priključak za odzračivanje | Protok (L/min) | Broj plana uključivanja |
|----------------|------------|----------------------------|----------------|-------------------------|
| K- 07 15 01 71 | G 1/8      | G 1/8                      | 450            | 2                       |
| K- 07 15 01 72 | G 1/4      | G 1/4                      | 550            | 2                       |