


K-SCHOTTVERB POLYPROPYLEN

Bulkhead couplings - polypropylene

HANSA FLEX

Osobine

| | |
|--------------------------|---|
| Radni pritisak | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 2.5 bar (at 90 °C) |
| Materijal | Polypropylene (PP) |
| Radna temperatura | Max. 90 °C |

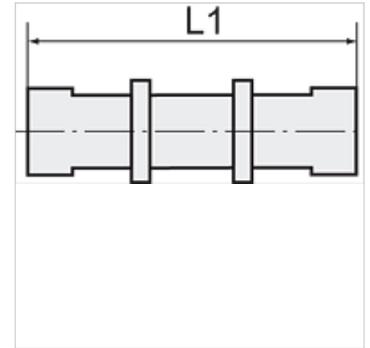

Napomena

Ostali podaci na upit.

Opis

Chemically resistant to almost all inorganic acids and bases, even in high concentrations and at temperatures greater than 90 °C.

Artikal

| Naziv | za crevo | Navoj | L1 (mm) | SW |
|----------------|--------------|------------|------------|-------|
| K- 07 40 41 71 | 4 mm / 6 mm | M 10 x 1 | 53,0 | 14 mm |
| K- 07 40 41 72 | 6 mm / 8 mm | M 14 x 1,5 | 64,0 | 19 mm |
| K- 07 40 41 73 | 8 mm / 10 mm | M 16 x 1,5 | 73,0 | 22 mm |
| K- 07 40 41 74 | 9 mm / 12 mm | M 18 x 1,5 | 84,0 | 24 mm |