

K-ODER-VENTIL
OR valves

Osobine

Radni pritisak	2 - 10 bar
Temperaturni opseg	-10 °C to +80 °C
Protok pri 6,3 bara i Δ 1 bar	500 Nl/min (G 1/8), 1300 Nl/min (G 1/4)
Telo ventila	Aluminijum
Kugla	Stainless steel
Zaptivke	NBR



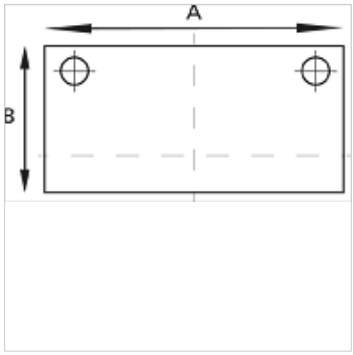

Napomena

Ostali podaci na upit.

Opis

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Artikal

Naziv	Navoj	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.