K-SCHALLDAE SINTERBR GE MS


Silencers, sintered bronze, with brass hexagon nut and brass thread

HANSA-FLEX

Osobine

Radni pritisak	maks. 10 bara
Radna temperatura	-10 °C to +200 °C
Nivo buke 6bara	80 ~ 90 dB(A)



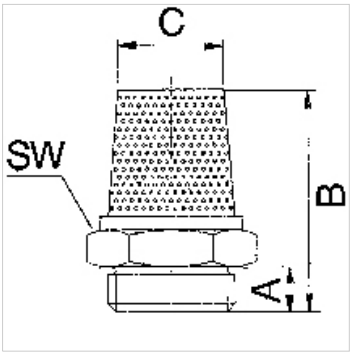

Opis

For reducing the exhaust noise generated by pneumatic equipment.

Artikal

Naziv	Navoj	A (mm)	B (mm)	C (mm)	SW
K- 07 40 35 11	M 5	5,0	20,8	4,0	9 mm
K- 07 40 35 12	G 1/8	5,5	22,8	8,0	13 mm
K- 07 40 35 13	G 1/4	7,0	33,5	10,0	17 mm
K- 07 40 35 14	G 3/8	9,0	41,7	14,0	22 mm
K- 07 40 35 15	G 1/2	10,0	48,5	18,0	24 mm

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.