


K-SCHALLDAE SINTERBR S 1

Silencers, sintered bronze, slotted

HANSA FLEX

Osobine

| | |
|-------------------|-------------------|
| Radni pritisak | maks. 10 bara |
| Radna temperatura | -10 °C to +200 °C |
| Nivo buke 6bara | 80 ~ 90 dB(A) |

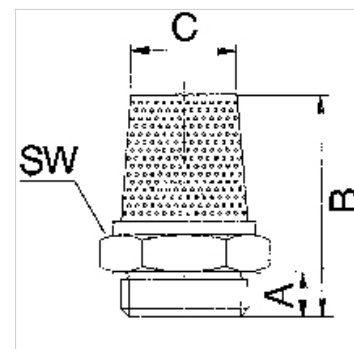

Opis

For reducing the exhaust noise generated by pneumatic equipment.

Artikal

| Naziv | Navoj | A (mm) | B (mm) | C (mm) |
|----------------|-------|-----------|-----------|-----------|
| K- 07 40 35 07 | G 1/8 | 5,5 | 21,0 | 8,0 |
| K- 07 40 35 08 | G 1/4 | 8,5 | 27,0 | 10,0 |
| K- 07 40 35 09 | G 3/8 | 11,0 | 36,0 | 15,0 |
| K- 07 40 35 10 | G 1/2 | 11,0 | 44,0 | 19,0 |