


K-KFE-BKR

KFE-ball valves

HANSA FLEX

Osobine

Radni pritisak	maks. 10 bara
Temperatura medija	max. +110 °C
Naglavak	I.D. 13
Ručna poluga	Die cast zinc
Kugla, zaptivka reznog prstena	PTFE
Zaptivka vretena, naglavak za crevo, kapa	EPDM

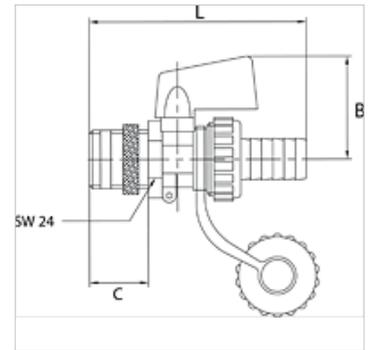

Napomena

Ostali podaci na upit.

Opis

Boiler, filling and drain valves for heating systems.

Artikal

Naziv	Navoj	B (mm)	C (mm)	L (mm)	Materijal
K- 07 30 30 34	G 1/2	37,0	20,0	74,6	Brass with a bare metal surface
K- 07 30 30 35	G 1/2	37,0	20,0	74,6	Nickel-plated brass