



# K-KFE-BKR

KFE-ball valves

**HANSA FLEX**

## Osobine

Radni pritisak	maks. 10 bara
Temperatura medija	max. +110 °C
Naglavak	I.D. 13
Ručna poluga	Die cast zinc
Kugla, zaptivka reznog prstena	PTFE
Zaptivka vretena, naglavak za crevo, kapa	EPDM

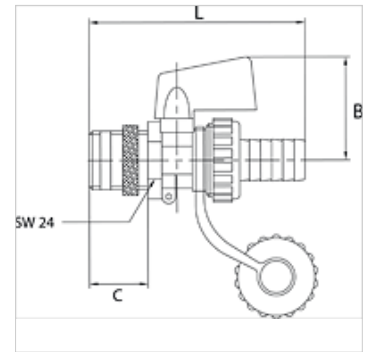

## Napomena

Ostali podaci na upit.

## Opis

Boiler, filling and drain valves for heating systems.

## Artikal

Naziv	Navoj	B (mm)	C (mm)	L (mm)	Materijal
K- 07 30 30 34	G 1/2	37,0	20,0	74,6	Brass with a bare metal surface
K- 07 30 30 35	G 1/2	37,0	20,0	74,6	Nickel-plated brass