


K-SCHOTT-STECK MINI

Bulkhead connectors, mini

HANSA FLEX

Osobine

Radni pritisak	Max. 10 bar, vacuum
Oblast primene	Air, vacuum
preporučena creva	PU or PA (nylon)
Mediji	Komprimovani vazduh
Norma	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Temperaturni opseg	0 °C to +60 °C
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic

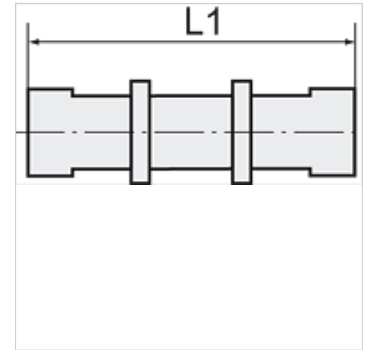

Napomena

Ostali podaci na upit.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikal

Naziv	Navoj	Ø mm za crevo spolja	L1 (mm)	SW
K- 07 40 50 12	M 8 x 0.75	3 mm	20,3	10 mm
K- 07 40 50 10	M 10 x 1.0	4 mm	24,0	12 mm
K- 07 40 50 11	M 12 x 1.0	6 mm	23,8	14 mm