


# K-Y-STECK VB MINI

Y unions, mini

**HANSA FLEX**

## Osobine

Radni pritisak	Max. 10 bar, vacuum
Oblast primene	Air, vacuum
preporučena creva	PU or PA (nylon)
Mediji	Komprimovani vazduh
Temperaturni opseg	0 °C to +60 °C
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic

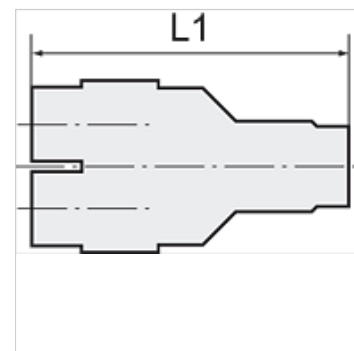

## Napomena

Ostali podaci na upit.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Artikal

Naziv	Ø mm za crevo spolja	L1 (mm)
K- 07 40 50 20	3 mm	28,8
K- 07 40 50 21	4 mm	29,4
K- 07 40 50 22	6 mm	31,8