


K-L-STECK VB VA

Union elbows

HANSA FLEX

Osobine

| | |
|----------------------------|---|
| Pulsirajući radni pritisak | Max. 10 bar |
| Pritisak | Max. 15 bar (depending on pipe quality) |
| pogodan materijal cevi | PVDF, PTFE, stainless steel, PA, PU |
| Temperatura okoline | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| Materijal | Plemeniti čelik 1.4404 |
| Zaptivni materijal | FKM |

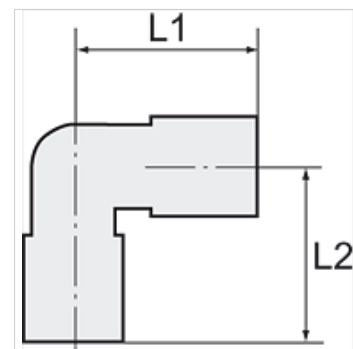

Napomena

Ostali podaci na upit.

Opis

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

Artikal

| Naziv | Ø mm za crevo spolja | L1 (mm) | L2 (mm) |
|----------------|----------------------|------------|------------|
| K- 07 40 24 20 | 4 mm | 17,0 | 17,0 |
| K- 07 40 24 21 | 6 mm | 20,0 | 20,0 |
| K- 07 40 24 22 | 8 mm | 21,0 | 21,0 |
| K- 07 40 24 23 | 10 mm | 25,0 | 25,0 |
| K- 07 40 24 24 | 12 mm | 27,0 | 27,0 |