


# K-STECKVERSCHR AGR-K SK VA

Male connectors, conical male thread with outer hex

**HANSA FLEX**

## Osobine

Pulsirajući radni pritisak	Max. 10 bar
Pritisak	Max. 15 bar (depending on pipe quality)
pogodan materijal cevi	PVDF, PTFE, stainless steel, PA, PU
Norma	R thread acc. to ISO 7-1
Temperatura okoline	-20 °C to max. +150 °C (depending on pipe quality and diameter)
Materijal	Plemeniti čelik 1.4404
Zaptivni materijal	FKM

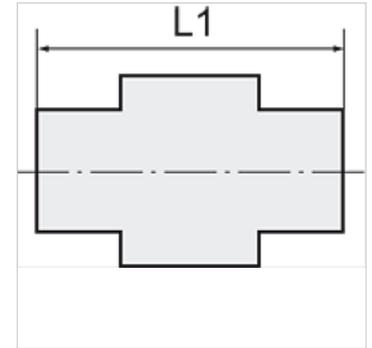

## Napomena

Ostali podaci na upit.

## Opis

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Artikal

Naziv	Navoj	Ø mm za crevo spolja	L1 (mm)	SW
K- 07 40 24 10	R 1/8	4 mm	16,6	10 mm
K- 07 40 24 11	R 1/8	6 mm	21,2	12 mm
K- 07 40 24 12	R 1/8	8 mm	25,2	14 mm
K- 07 40 24 07	R 1/4	4 mm	20,6	14 mm
K- 07 40 24 08	R 1/4	6 mm	20,7	14 mm
K- 07 40 24 09	R 1/4	8 mm	23,7	14 mm
K- 07 40 24 06	R 1/4	10 mm	30,3	16 mm
K- 07 40 24 13	R 3/8	10 mm	23,5	17 mm
K- 07 40 24 14	R 3/8	12 mm	27,4	19 mm
K- 07 40 24 05	R 1/2	12 mm	27,4	22 mm