# K-T-STECK VERS DRE AG OR 2


Male branch tees, swivel type, parallel male thread with O-ring

HANSA-FLEX

## Osobine

| | |
|---|---|
| **Radni pritisak** | Max. 15 bar, coarse vacuum |
| **Oblast primene** | Air, vacuum |
| **preporučena creva** | PU or PA (nylon) |
| **Mediji** | Compressed air and all gases or liquids that are compatible with the materials |
| **Temperaturni opseg** | -20 °C to +80 °C |
| **Zaptivna površina** | Parallel version: O-ring in housing |
| **Materijal** | Plastic, Nickel plated brass |
| **Pritisni prsten** | Plastic |



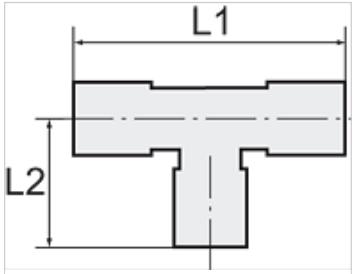


## Napomena

Ostali podaci na upit.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikal

| Naziv | Navoj | Ø mm za crevo spolja | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 02 59** | M 5 | 4 mm | 36,0 | 21,1 | 8 mm |
| **K- 07 40 02 60** | M 5 | 6 mm | 40,0 | 22,2 | 8 mm |
| **K- 07 40 02 71** | G 1/8 | 4 mm | 36,0 | 19,0 | 14 mm |
| **K- 07 40 02 72** | G 1/8 | 6 mm | 40,0 | 20,1 | 14 mm |
| **K- 07 40 02 73** | G 1/8 | 8 mm | 45,4 | 25,7 | 14 mm |
| **K- 07 40 02 68** | G 1/4 | 4 mm | 36,0 | 19,0 | 17 mm |
| **K- 07 40 02 69** | G 1/4 | 6 mm | 40,0 | 20,1 | 17 mm |
| **K- 07 40 02 70** | G 1/4 | 8 mm | 45,4 | 21,7 | 17 mm |
| **K- 07 40 02 66** | G 1/4 | 10 mm | 53,8 | 27,6 | 17 mm |
| **K- 07 40 02 67** | G 1/4 | 12 mm | 58,6 | 28,9 | 17 mm |
| **K- 07 40 02 77** | G 3/8 | 6 mm | 40,0 | 21,2 | 20 mm |
| **K- 07 40 02 78** | G 3/8 | 8 mm | 45,4 | 22,8 | 20 mm |
| **K- 07 40 02 74** | G 3/8 | 10 mm | 53,8 | 24,6 | 20 mm |
| **K- 07 40 02 75** | G 3/8 | 12 mm | 58,6 | 25,9 | 20 mm |
| **K- 07 40 02 76** | G 3/8 | 16 mm | 69,0 | 34,2 | 20 mm |
| **K- 07 40 02 64** | G 1/2 | 6 mm | 40,0 | 23,6 | 24 mm |
| **K- 07 40 02 65** | G 1/2 | 8 mm | 45,4 | 25,2 | 24 mm |
| **K- 07 40 02 61** | G 1/2 | 10 mm | 53,8 | 26,5 | 24 mm |
| **K- 07 40 02 62** | G 1/2 | 12 mm | 58,6 | 27,8 | 24 mm |
| **K- 07 40 02 63** | G 1/2 | 16 mm | 69,0 | 30,9 | 24 mm |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*