# K-L-STECK VB 10BAR


Union elbows (pressure max. 10 bar)

HANSA-FLEX

## Osobine

| | |
|---|---|
| **Radni pritisak** | Max. 10 bar |
| **Oblast primene** | Air, vacuum |
| **preporučena creva** | PU or PA (nylon) |
| **Mediji** | Compressed air and all gases or liquids that are compatible with the materials |
| **Temperaturni opseg** | -20 °C to +80 °C |
| **Materijal** | Plastic, Nickel plated brass |
| **Pritisni prsten** | Plastic |



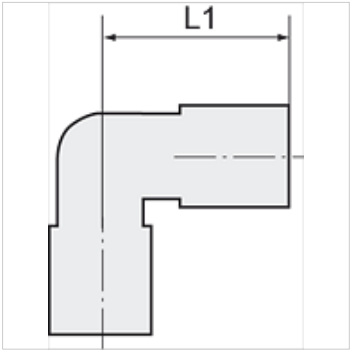


## Napomena

Ostali podaci na upit.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikal

| Naziv | Ø mm za crevo spolja | L1 (mm) |
|---|---|---|
| **K- 07 40 03 50** | 4 mm | 17,5 |
| **K- 07 40 03 51** | 6 mm | 18,7 |
| **K- 07 40 03 52** | 8 mm | 22,4 |
| **K- 07 40 03 53** | 10 mm | 27,2 |
| **K- 07 40 03 54** | 12 mm | 28,9 |
| **K- 07 40 41 38** | 14 mm | 29,8 |
| **K- 07 40 03 55** | 16 mm | 30,8 |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*