


# K-L-SCHOTT STECK

Bulkhead connectors, elbow type

**HANSA FLEX**

## Osobine

<b>Radni pritisak</b>	Max. 15 bar, coarse vacuum
<b>Oblast primene</b>	Air, vacuum
<b>preporučena creva</b>	PU or PA (nylon)
<b>Mediji</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temperaturni opseg</b>	-20 °C to +80 °C
<b>Materijal</b>	Plastic, Nickel plated brass
<b>Pritisni prsten</b>	Plastic

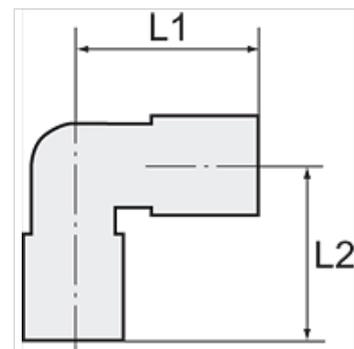

## Napomena

Ostali podaci na upit.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikal

Naziv	Ø mm za crevo spolja	Navoj razvodne table	L1 (mm)	L2 (mm)	SW
K- 07 40 04 47	4 mm	M 12 x 1	17,5	31,3	14 mm
K- 07 40 04 48	6 mm	M 14 x 1	18,7	37,9	17 mm
K- 07 40 04 49	8 mm	M 16 x 1	22,5	43,6	19 mm
K- 07 40 04 50	10 mm	M 20 x 1	27,2	51,2	24 mm
K- 07 40 04 51	12 mm	M 22 x 1	29,3	56,1	27 mm
K- 07 40 04 52	16 mm	M 27 x 1	32,5	62,6	30 mm