
K-T-STECK VERS ASK DREH AG OR

Male branch tees with outer hex, swivel type, parallel male thread with O-ring

Osobine

Radni pritisak	Max. 16 bar
Radna temperatura	-20 °C to +150 °C
Materijal	Mesing, niklovan
Pritisni prsten	Nickel-plated brass
O-prsten	FKM (FPM)
Stezni prsten	Stainless steel



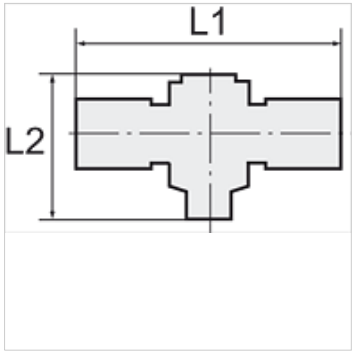

Napomena

Ostali podaci na upit.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikal

Naziv	Navoj	Ø mm za crevo spolja	L1 (mm)	L2 (mm)	SW
K- 07 40 28 04	G 1/8	4 mm	42,0	28,0	14 mm
K- 07 40 28 05	G 1/8	6 mm	46,0	28,0	14 mm
K- 07 40 28 03	G 1/4	6 mm	48,0	33,0	17 mm

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.