


K-Y-STECK VB STECKNIP MINI

Y unions with push-in plug, mini

HANSA FLEX

Osobine

Radni pritisak	Max. 10 bar, vacuum
Oblast primene	Air, vacuum
preporučena creva	PU or PA (nylon)
Mediji	Komprimovani vazduh
Temperaturni opseg	0 °C to +60 °C
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic

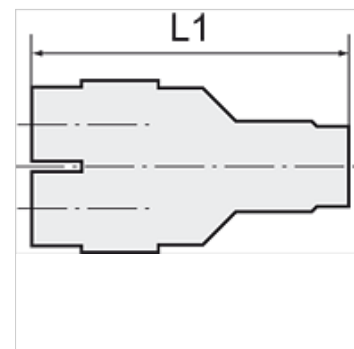

Napomena

Ostali podaci na upit.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikal

Naziv	Ø mm za crevo spolja	L1 (mm)	Utični nastavak (mm)
K- 07 40 50 25	3 mm	38,0	3
K- 07 40 50 26	4 mm	43,0	4
K- 07 40 50 27	6 mm	46,0	6