


K-K STUECK IG AG

Crosses, 3 x female, 1 x male

HANSA FLEX

Osobine

| | |
|-------------------|------------------------------|
| Radni pritisak | 60 bar |
| Radna temperatura | Max. 150 °C |
| Unutrašnji navoj | Parallel to DIN EN ISO 228-1 |
| Materijal | Mesing, niklovan |
| Spoljni navoj | conical acc. DIN 2999 |

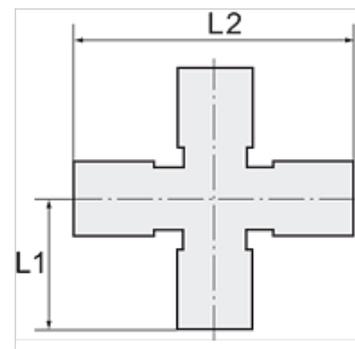

Napomena

Ostali podaci na upit.

Artikal

| Naziv | Navoj | L1 (mm) | L2 (mm) | SW |
|----------------|---------|------------|------------|-------|
| K- 07 40 49 11 | G/R 1/8 | 18,5 | 42,0 | 10 mm |
| K- 07 40 49 12 | G/R 1/4 | 23,5 | 51,0 | 13 mm |
| K- 07 40 49 13 | G/R 3/8 | 26,0 | 56,0 | 17 mm |
| K- 07 40 49 14 | G/R 1/2 | 31,0 | 67,0 | 21 mm |