


K-K VERBINDUNGEN

X-unions

HANSA FLEX

Osobine

| | |
|-------------------|------------------|
| Radni pritisak | Max. 18 bar |
| Zapivni materijal | Buna-N |
| Materijal | Mesing, niklovan |

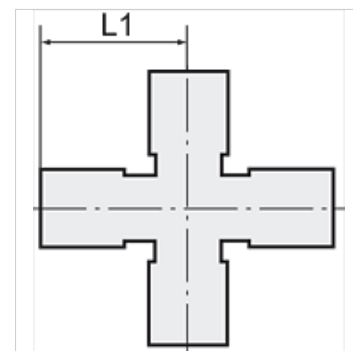

Napomena

Ostali podaci na upit.

Artikal

| Naziv | za crevo | L1 (mm) | SW |
|----------------|--------------|------------|-------|
| K- 07 40 42 58 | 5 mm / 3 mm | 21,5 | 8 mm |
| K- 07 40 42 59 | 6 mm / 4 mm | 22,5 | 8 mm |
| K- 07 40 42 60 | 8 mm / 6 mm | 22,5 | 10 mm |
| K- 07 40 42 57 | 10 mm / 8 mm | 25,5 | 12 mm |