
K-SCHL-AUFROLLER STANDARD


Hose reel - standard type

HANSA FLEX

Osobine

Materijal creva	Polyurethane (PUR)
Radna temperatura	max +40 °C
Primena	for compressed air and water
Obrtni ugao	150°



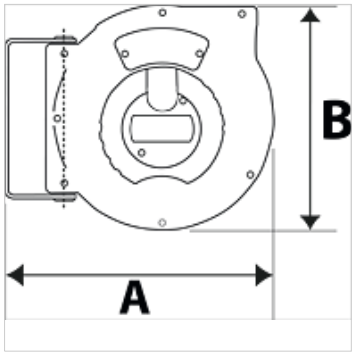

Napomena

Ostali podaci na upit.

Opis

Hose reel with automatic rewind and spring assembly. Robust hose locking mechanism, impact resistant plastic casing. Swivel wall mount made made from coated steel. Easy mounting on the wall or ceiling.

Artikal

Naziv	Mera creva	A (mm)	B (mm)	Navoj izlaz	Navoj ulaz	maks. radni pritisak (bar)	Dužina creva (m)
K- 07 10 11 03	12 mm x 8 mm	325,0	275,0	G 1/4 AG	G 1/4 fem	10	9
K- 07 10 11 04	12 mm x 8 mm	355,0	315,0	G 1/4 AG	G 1/4 fem	15	12

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.