
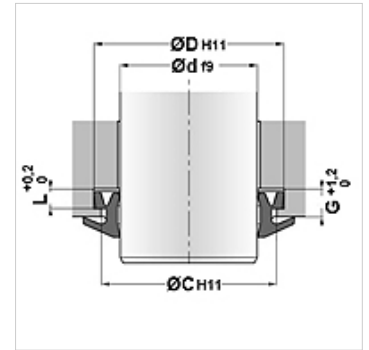


## Osobine

|                  |   |
|------------------|---|
| Konstrukcija     | Skidač  |
| Brzina max.      | 4,0 m/s   |
| Temperatura min. | -40 °C  |
| Temperatura max. | 110 °C  |
| Mediji           | mineralno ulje  |
| Montaža          | Skidač oblikovati u oblik bubrega i pritisnuti u prihvatni žleb     |
| Primena          | For the usage at higher pollution, for e.g.:<br>Mining<br>foundries |
| Materijal        | PU 93° Shore A  |



## Artikal

| Naziv   | C<br>(mm) | D<br>(mm) | d<br>(mm) | G<br>(mm) | H<br>(mm) | L<br>(mm) |
|---------|-----------|-----------|-----------|-----------|-----------|-----------|
| WUH-26  | 32,0      | 34,0      | 26        | 5,00      | 8,7       | 4,0       |
| WUH-30  | 36,0      | 38,0      | 30        | 5,00      | 8,7       | 4,0       |
| WUH-32  | 38,0      | 40,0      | 32        | 5,00      | 8,7       | 4,0       |
| WUH-36  | 42,0      | 44,0      | 36        | 5,00      | 8,7       | 4,0       |
| WUH-40  | 46,0      | 48,0      | 40        | 5,00      | 8,7       | 4,0       |
| WUH-45  | 51,0      | 53,0      | 45        | 5,00      | 8,7       | 4,0       |
| WUH-50  | 56,0      | 58,0      | 50        | 5,00      | 8,7       | 4,0       |
| WUH-52  | 58,0      | 60,0      | 52        | 5,00      | 8,7       | 4,0       |
| WUH-56  | 62,0      | 64,0      | 56        | 5,00      | 8,7       | 4,0       |
| WUH-60  | 66,0      | 68,0      | 60        | 5,00      | 8,7       | 4,0       |
| WUH-68  | 74,0      | 76,0      | 68        | 5,00      | 8,7       | 4,0       |
| WUH-70  | 76,0      | 78,0      | 70        | 5,00      | 8,7       | 4,0       |
| WUH-75  | 81,0      | 83,0      | 75        | 5,00      | 8,7       | 4,0       |
| WUH-80  | 86,0      | 88,0      | 80        | 5,00      | 8,7       | 4,0       |
| WUH-100 | 107,0     | 110,0     | 100       | 8,10      | 11,7      | 6,3       |