


K-2-BK AG 20-63 INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm with external thread

HANSA FLEX

Osobine

| | |
|--------------------|-------------------------------------|
| Mediji | Compressed air, vacuum, inert gases |
| Radni pritisak | -0,99 bar - 15 bar |
| Temperaturni opseg | -20 °C to +80 °C |
| Zaptivka | NBR |
| Kučiče | Nickel-plated brass |
| Stezni prsten | Stainless steel 1.4301 |
| Navrtka | Nickel-plated brass |
| O-prsten | NBR |
| Sigurnosni prsten | Technopolymer |

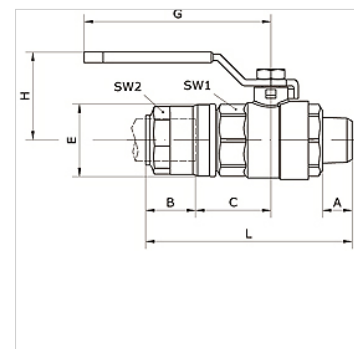

Artikal

| Naziv | Cev spolja Ø | Priključak | A (mm) | B (mm) | C (mm) | DN | E (mm) | G (mm) | H (mm) | L (mm) | SW1 (mm) | SW2 (mm) |
|----------------|--------------|------------|-----------|-----------|-----------|----|-----------|-----------|-----------|-----------|-------------|-------------|
| K- 07 40 54 42 | 20 mm | R 1/2 | 18,0 | 31,5 | 29,3 | 15 | 34,5 | 88 | 42,0 | 100,8 | 32 | 30 |
| K- 07 40 54 43 | 25 mm | R 3/4 | 18,0 | 38,5 | 30,8 | 20 | 42,5 | 106 | 47,5 | 119,3 | 41 | 35 |