

# K-2-BK V DURCHG INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

**HANSA FLEX**

## Osobine

**Mediji** Compressed air, vacuum, inert gases

**Radni pritisak** -0,99 bar - 15 bar

**Temperaturni opseg** -20 °C to +80 °C

**Zaptivka** NBR


**Kućište** Nickel-plated brass

**Stezni prsten** Stainless steel 1.4301

**Navrtka** Aluminium

**O-prsten** NBR

**Sigurnosni prsten** Technopolymer

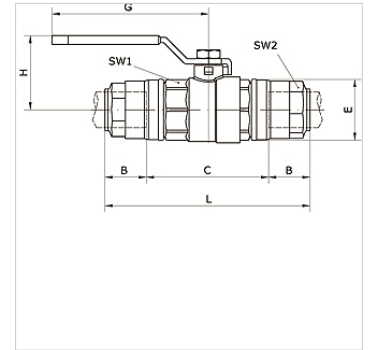

## Artikal

Naziv	Cev spolja Ø	B (mm)	C (mm)	DN	E (mm)	G (mm)	H (mm)	L (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 55 05	63 mm	57,5	38,0	59	94,0	240	111,5	232,0	89	75