

K-2-BK V DURCHG INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

HANSA FLEX

Osobine

Mediji Compressed air, vacuum, inert gases

Radni pritisak -0,99 bar - 15 bar

Temperaturni opseg -20 °C to +80 °C

Zaptivka NBR


Kučište Nickel-plated brass

Stezni prsten Stainless steel 1.4301

Navrtka Aluminium

O-prsten NBR

Sigurnosni prsten Technopolymer

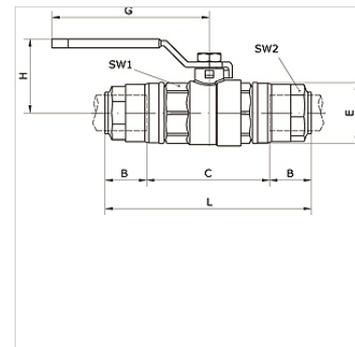

Artikal

| Naziv | Cev spolja Ø | B (mm) | C (mm) | DN | E (mm) | G (mm) | H (mm) | L (mm) | SW1 (mm) | SW2 (mm) |
|----------------|--------------|-----------|-----------|----|-----------|-----------|-----------|-----------|-------------|-------------|
| K- 07 40 55 05 | 63 mm | 57,5 | 38,0 | 59 | 94,0 | 240 | 111,5 | 232,0 | 89 | 75 |