


K-3WSV ELKT HANSA PRO

3/2-way poppet valve, electrically actuated, for HANSA PRO

HANSA FLEX

Osobine

| | |
|------------------------|--|
| Temperatura medija | -10 °C to +50 °C |
| Temperatura okoline | -10 °C to +50 °C |
| Mediji | Komprimovani vazduh |
| Vrsta zaštite | IP 65 acc. to DIN 40050 |
| Vrsta pričvršćivanje | Line mounting, mounting kit or wall mounting |
| Aktiviranje | electrical |
| Područje pritiska | 2 - 10 bar |
| Položaj ugradnje | Any |
| Nominalni protok G 1/2 | 5.200 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominalni protok G 3/8 | 4.300 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE maks 11 | 10 bar |
| Kućište | PA66 |

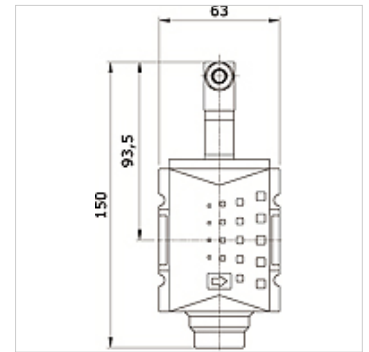

Artikal

| Naziv | Priključak | Nominalni napon/ vrsta struje | Konstrukciona veličina |
|----------------|------------|-------------------------------|------------------------|
| K- 07 25 22 48 | G 3/8 i | 24 V DC | 2 |
| K- 07 25 22 49 | G 3/8 i | 115 V AC 50 Hz | 2 |
| K- 07 25 22 50 | G 3/8 i | 230 V AC 50 Hz | 2 |
| K- 07 25 22 51 | G 1/2 i | 24 V DC | 2 |
| K- 07 25 22 52 | G 1/2 i | 115 V AC 50 Hz | 2 |
| K- 07 25 22 53 | G 1/2 i | 230 V AC 50 Hz | 2 |