


# K-FI HANSA PRO

Compressed air filter, with manual/semi-automatic condensate drain,  
HANSA PRO

**HANSA FLEX**

## Osobine

Temperatura medija	-10 °C to +50 °C
Temperatura okoline	-10 °C to +50 °C
Mediji	Komprimovani vazduh
Konstrukcija	Centrifugal filter
Vrsta pričvršćivanje	Line mounting, mounting kit or wall mounting
Položaj ugradnje	Vertical, drain down
Filterska jedinica	5,00 µm
maks. količina kondenzata	49 cc
Nominalni protok G 1/2	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominalni protok G 3/8	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Pe maks	16 bar
Element filtera	Cellpor
Kućiče	PA66

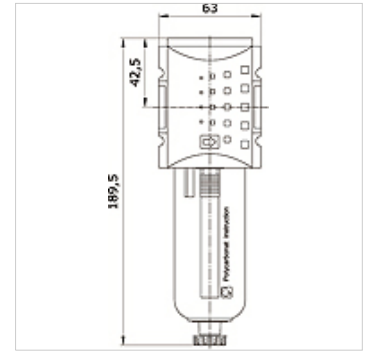

## Artikal

Naziv	Priključak	Posuda	Konstrukciona veličina	Ispust kondenzata
K- 07 25 21 20	G 3/8 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 21	G 1/2 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 22	G 3/8 i	zinc with visual display	2	manual / semi-automatic
K- 07 25 21 23	G 1/2 i	zinc with visual display	2	manual / semi-automatic