


# K-FI FEIN HANSA PRO

Compressed air fine filter, with manual/semi-automatic condensate drain, HANSA PRO

**HANSA FLEX**

## Osobine

|                         |  |
|-------------------------|--|
| Temperatura medija      | -10 °C to +50 °C                             |
| Temperatura okoline     | -10 °C to +50 °C                             |
| Mediji                  | Komprimovani vazduh                          |
| Konstrukcija            | fiber filter                                 |
| Vrsta pričvršćivanje    | Line mounting, mounting kit or wall mounting |
| Položaj ugradnje        | Vertical, drain down                         |
| Filterska jedinica      | 0,01 µm                                      |
| Efikasnot filtera       | 99.999 %                                     |
| Nominalni protok G 1/2  | 750 l/min (P1 = 6 bar/Delta P = 0,1 bar)     |
| Nominalni protok G 3/8  | 750 l/min (P1 = 6 bar/Delta P = 0,1 bar)     |
| Pe maks                 | 16 bar                                       |
| Element filtera         | Borsilicate-Al                               |
| Kućište                 | PA66   |
| Sadržaj preostalog ulja | 0,01 mg/m3                                   |

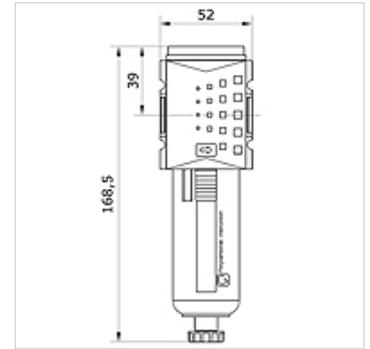

## Artikal

| Naziv          | Priključak | Posuda                             | Konstrukciona veličina | Ispust kondenzata       |
|----------------|------------|------------------------------------|------------------------|-------------------------|
| K- 07 25 21 28 | G 3/8 i    | polycarbonate with protective cage | 2                      | manual / semi-automatic |
| K- 07 25 21 29 | G 1/2 i    | polycarbonate with protective cage | 2                      | manual / semi-automatic |
| K- 07 25 21 30 | G 3/8 i    | zinc with visual display           | 2                      | manual / semi-automatic |
| K- 07 25 21 31 | G 1/2 i    | zinc with visual display           | 2                      | manual / semi-automatic |