

# K-RED STUECK 20-63 INFI

Reducer  $\varnothing$  20 mm –  $\varnothing$  63 mm

**HANSA FLEX**

## Osobine

**Mediji** Compressed air, vacuum, inert gases

**Radni pritisak** -0,99 bar - 15 bar

**Temperaturni opseg** -20 °C to +80 °C

**Zaptivka** NBR


**Kućište** Nickel-plated brass

**Stežni prsten** Stainless steel 1.4301

**Navrtka** Nickel-plated brass

**O-prsten** NBR

**Sigurnosni prsten** Technopolymer

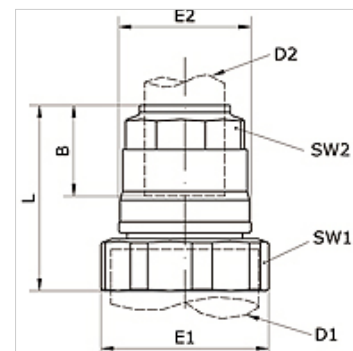

## Artikal

| Naziv          | Cev spolja $\varnothing$ | B<br>(mm) | D1<br>(mm) | D2<br>(mm) | E1<br>(mm) | E2<br>(mm) | L<br>(mm) | SW1<br>(mm) | SW2<br>(mm) |
|----------------|--------------------------|-----------|------------|------------|------------|------------|-----------|-------------|-------------|
| K- 07 40 54 26 | 25 - 20 mm               | 31,5      | 25,0       | 20         | 43,5       | 34,5       | 48,0      | 42          | 30          |
| K- 07 40 54 27 | 32 - 20 mm               | 31,5      | 32,0       | 20         | 54,0       | 34,5       | 48,5      | 52          | 30          |
| K- 07 40 54 28 | 32 - 25 mm               | 38,5      | 32,0       | 25         | 54,0       | 42,5       | 55,0      | 63          | 35          |
| K- 07 40 54 29 | 40 - 20 mm               | 31,5      | 40,0       | 20         | 65,0       | 34,5       | 50,0      | 63          | 30          |
| K- 07 40 54 30 | 40 - 25 mm               | 38,5      | 40,0       | 25         | 65,0       | 42,5       | 56,5      | 63          | 35          |
| K- 07 40 54 31 | 40 - 32 mm               | 46,0      | 40,0       | 32         | 65,0       | 52,0       | 63,5      | 63          | 45          |
| K- 07 40 54 32 | 50 - 32 mm               | 46,0      | 50,0       | 32         | 75,0       | 52,0       | 63,5      | 73          | 45          |
| K- 07 40 54 33 | 50 - 40 mm               | 52,0      | 50,0       | 40         | 75,0       | 63,0       | 69,0      | 73          | 55          |