


# K-T-STECK VB 20-63 SCHANH IG INFI

T-push-in connector Ø 20 mm – Ø 63 mm with integrated gooseneck and internal thread

**HANSA FLEX**

## Osobine

|                    |                                     |
|--------------------|-------------------------------------|
| Mediji             | Compressed air, vacuum, inert gases |
| Radni pritisak     | -0,99 bar - 15 bar                  |
| Temperaturni opseg | -20 °C to +80 °C                    |
| Zaptivka           | NBR                                 |
| Kučište            | Aluminium                           |
| Stezni prsten      | Stainless steel 1.4301              |
| Navrtka            | Aluminium                           |
| O-prsten           | NBR                                 |
| Sigurnosni prsten  | Technopolymer                       |

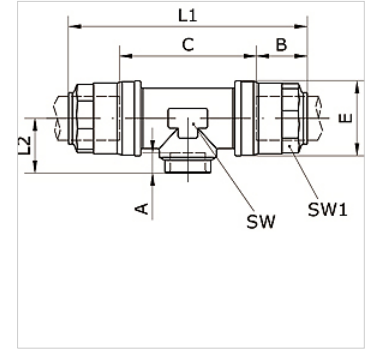

## Artikal

| Naziv          | Cev spolja Ø | Priključak | A<br>(mm) | B<br>(mm) | C<br>(mm) | E<br>(mm) | L1<br>(mm) | L2<br>(mm) | SW<br>(mm) | SW1<br>(mm) |
|----------------|--------------|------------|-----------|-----------|-----------|-----------|------------|------------|------------|-------------|
| K- 07 40 55 02 | 63 mm        | G 1/2"     | 13,5      | 57,5      | 88,0      | 94,0      | 203,0      | 53,0       | 80         | 75          |
| K- 07 40 55 01 | 63 mm        | G 3/4      | 14,5      | 57,5      | 88,0      | 94,0      | 203,0      | 54,0       | 80         | 75          |
| K- 07 40 55 03 | 63 mm        | G 1        | 17,5      | 57,5      | 88,0      | 94,0      | 203,0      | 56,5       | 80         | 75          |