
K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Osobine

maks. radni pritisak	0,7 MPa
maks. radni pritisak	0.15 MPa
Prigušivanje	elastic stop
Funkcija	double working
Kontrolni pritisak	1,05 MPa
Temperatura medija	-10 °C to +60 °C
Temperatura okoline	-10 °C to +60 °C
Brzina klipa	50 to 500 mm/s
Mediji	Komprimovani vazduh
Serija	MXS
Ostali podaci	Carriage and air cylinder as a complete unit Ideal for precision assembly applications High resistance to the cultivation of loads

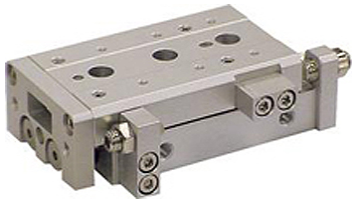

Opis

Compact air slide table, series MXS, slide table and air cylinder as complete unit, ideal for precise installation applications, high resistance capacity when building up loads, with stroke limiting unit or shock absorber, (order separately), no stroke adjustment, double action, piston diameter / stroke: 20/100 mm, connection size: G 1/8

Artikal

Naziv	Ø klipa (mm)	Hod (mm)	Pneumatski priključak	Težina (kg)
K- 07 55 01 46	6	10	M 3	0,080
K- 07 55 01 47	6	20	M 3	0,100
K- 07 55 01 48	6	30	M 3	0,115
K- 07 55 01 49	6	40	M 3	0,155
K- 07 55 01 50	6	50	M 3	0,180
K- 07 55 01 52	8	10	M 5	0,150
K- 07 55 01 53	8	20	M 5	0,160
K- 07 55 01 54	8	30	M 5	0,190
K- 07 55 01 55	8	40	M 5	0,235
K- 07 55 01 56	8	50	M 5	0,285
K- 07 55 01 57	8	75	M 5	0,410
K- 07 55 01 27	12	10	M 5	0,325
K- 07 55 01 29	12	20	M 5	0,325
K- 07 55 01 30	12	30	M 5	0,325
K- 07 55 01 31	12	40	M 5	0,385
K- 07 55 01 32	12	50	M 5	0,485
K- 07 55 01 33	12	75	M 5	0,660
K- 07 55 01 28	12	100	M 5	0,890
K- 07 55 01 35	16	10	M 5	0,570
K- 07 55 01 38	16	20	M 5	0,570
K- 07 55 01 39	16	30	M 5	0,580
K- 07 55 01 40	16	40	M 5	0,640
K- 07 55 01 41	16	50	M 5	0,760
K- 07 55 01 42	16	75	M 5	1,090
K- 07 55 01 36	16	100	M 5	0,770
K- 07 55 01 37	16	125	M 5	0,900
K- 07 55 00 01	20	10	G 1/8	0,960
K- 07 55 00 05	20	20	G 1/8	0,980
K- 07 55 00 06	20	30	G 1/8	1,010
K- 07 55 00 07	20	40	G 1/8	1,100
K- 07 55 00 08	20	50	G 1/8	1,250
K- 07 55 00 09	20	75	G 1/8	-
K- 07 55 00 02	20	100	G 1/8	2,150
K- 07 55 00 03	20	125	G 1/8	2,670
K- 07 55 00 04	20	150	G 1/8	3,190

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.

K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Artikal

Naziv	Ø klipa (mm)	Hod (mm)	Pneumatski priključak	Težina (kg)
K- 07 55 00 10	25	10	G 1/8	1,660
K- 07 55 00 14	25	20	G 1/8	1,680
K- 07 55 00 15	25	30	G 1/8	1,690
K- 07 55 00 16	25	40	G 1/8	1,840
K- 07 55 00 17	25	50	G 1/8	2,090
K- 07 55 00 18	25	75	G 1/8	2,650
K- 07 55 00 11	25	100	G 1/8	3,270
K- 07 55 00 12	25	125	G 1/8	4,140
K- 07 55 00 13	25	150	G 1/8	4,170

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.