


### Osobine

Radni pritisak	Max. 16 bar
Radna temperatura	-20 °C to +70°C
Materijal	Mesing, niklovan
Pritisni prsten	Hostaform
Stezni prsten	Stainless steel

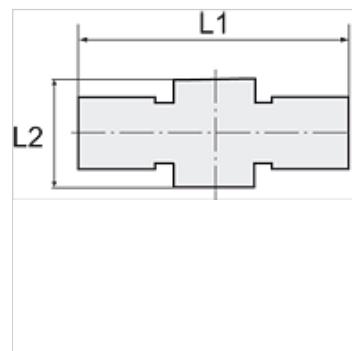

### Napomena

Ostali podaci na upit.

### Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

### Artikal

Naziv	za šuplji zavrtanj	Ø mm za crevo spolja	L1 (mm)	L2 (mm)
K-07 40 26 93	M 5	4 mm	36,0	9,0
K-07 40 26 97	G 1/8	4 mm	42,0	15,0
K-07 40 26 98	G 1/8	6 mm	46,0	15,0
K-07 40 26 99	G 1/8	8 mm	49,0	15,0
K-07 40 26 95	G 1/4	6 mm	48,0	17,0
K-07 40 26 96	G 1/4	8 mm	52,0	17,0
K-07 40 26 94	G 1/4	10 mm	52,0	17,0
K-07 40 27 02	G 3/8	8 mm	54,0	20,0
K-07 40 27 00	G 3/8	10 mm	56,0	20,0
K-07 40 27 01	G 3/8	12 mm	58,0	20,0