


K-TL-STECK VERS DRE MINI PAR

Male branch tee, swivel type, mini, parallel thread

HANSA FLEX

Osobine

Radni pritisak	Max. 10 bar, vacuum
Oblast primene	Air, vacuum
preporučena creva	PU or PA (nylon)
Mediji	Komprimovani vazduh
Norma	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Temperaturni opseg	0 °C to +60 °C
Zaptivna površina	O-ring (NBR)
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic

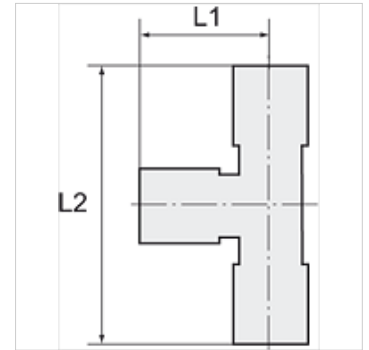

Napomena

Ostali podaci na upit.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikal

Naziv	Navoj	Ø mm za crevo spolja	L1 (mm)	L2 (mm)	SW
K- 07 40 23 28	M 3	3 mm	12,0	28,0	8 mm
K- 07 40 23 29	M 3	4 mm	14,0	31,2	8 mm
K- 07 40 23 30	M 5	3 mm	12,0	28,0	8 mm
K- 07 40 23 31	M 5	4 mm	14,0	31,2	8 mm
K- 07 40 23 32	M 5	6 mm	14,5	32,7	8 mm
K- 07 40 23 33	M 6	3 mm	12,0	28,5	10 mm
K- 07 40 23 34	M 6	4 mm	14,0	31,6	10 mm
K- 07 40 23 35	M 6	6 mm	14,5	33,1	10 mm
K- 07 40 23 36	G 1/8	4 mm	14,0	30,5	13 mm
K- 07 40 23 37	G 1/8	6 mm	16,0	32,5	13 mm
K- 07 40 23 38	R 1/8	4 mm	14,0	32,0	10 mm
K- 07 40 23 39	R 1/8	6 mm	14,5	33,5	10 mm