


HK B3/B14 230/400V IE3

Elektromotor B3/B14 230/400V IE2

HANSA FLEX

Osobine

| | |
|----------------------------|---|
| Verzija | Konstrukcija B3/B14 sa stopalima koja se mogu skinuti |
| Vrsta zaštite | IP 55 |
| Temperatura okoline | -20 °C do +40 °C |
| Materijal | Kućište: Aluminijum lakirano |

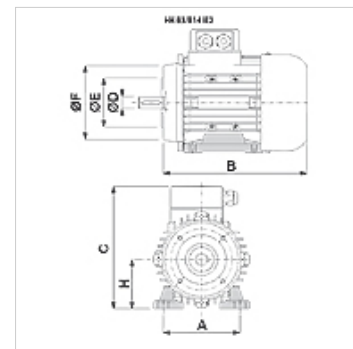

Opis

Motori sa kratkospojnim rotorom i sopstvenim hlađenjem koji štede energiju

Visoka efikasnost IE3 - IEC60034-30:2009

Dimenzionisani napon 230/400V 50Hz, 460V 60Hz; 4-polno

Tolerancija napona +/- 5%

Artikal

| Naziv | n 50 Hz (rpm) | P 50 Hz (kW) | I 50 Hz (A) | LF 50 Hz | H (mm) | A (mm) | B (mm) | C (mm) | Ø D osovina (mm) | Ø E (mm) | Ø F (mm) | η (IE3) % | Težina (kg) |
|----------------------------|------------------|-----------------|----------------|----------|-----------|-----------|-----------|-----------|---------------------|-------------|-------------|-----------|----------------|
| HKK 405A 80B4 IE3 | 1420 | 0,75 | 1,80 | 0,74 | 80 | 125 | 255 | 209 | 19 | 80 | 120 | 82,5 | 13,0 |
| HKK 406A 90SA4 IE3 | 1445 | 1,10 | 2,60 | 0,74 | 90 | 140 | 280 | 230 | 24 | 95 | 140 | 84,1 | 17,0 |
| HKK 407A 90LB4 IE3 | 1445 | 1,50 | 3,40 | 0,74 | 90 | 140 | 305 | 230 | 24 | 95 | 140 | 85,3 | 20,0 |
| HKK 408A 100LA4 IE3 | 1435 | 2,20 | 4,70 | 0,78 | 100 | 160 | 343 | 256 | 28 | 110 | 160 | 86,7 | 27,0 |
| HKK 409A 100LB4 IE3 | 1435 | 3,00 | 6,30 | 0,78 | 100 | 160 | 343 | 256 | 28 | 110 | 160 | 87,7 | 31,5 |

P 50 Hz = nominal output at 400 V/50 Hz – n 50 Hz = nominalni broj obrtaja pri 400 V/50 Hz – I 50 Hz = nominalna struja pri 400 V/50 Hz – LF 50 Hz = koeficijent snage cos phi pri 50 Hz – η (IE3) = efficiency to IE3 in % (at full load)