


# PAY 300 HB

Pres Armatür, AGR

**HANSA FLEX**

## Özellikler

|                      |                        |
|----------------------|------------------------|
| Bağlantı 1           | BSP dış dış silindirik |
| Sızdırmazlık şekli 1 | 60° içe havşalı        |
| Kısaltma             | AGR                    |
| Standart             | ISO 8434-6<br>BS 5200  |
| Teslimat kapsamı     | Pres Nipel + Kabuk     |
| Malzeme              | Çelik                  |
| Yüzey koruması       | galvaniz kaplı         |

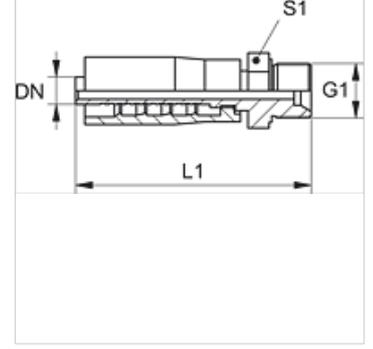

## Ürün

| Tanım         | DN | Boyut | İnç    | G1           | L1<br>(mm) | S1 |
|---------------|----|-------|--------|--------------|------------|----|
| PAY 306 HB    | 6  | 4     | 1/4"   | G 1/4" -19   | 64,0       | 17 |
| PAY 308 HB 10 | 8  | 5     | 5/16"  | G 3/8" -19   | 64,0       | 22 |
| PAY 310 HB    | 10 | 6     | 3/8"   | G 3/8" -19   | 71,0       | 22 |
| PAY 310 HB 13 | 10 | 6     | 3/8"   | G 1/2" -14   | 76,0       | 22 |
| PAY 313 HB    | 12 | 8     | 1/2"   | G 1/2" -14   | 79,0       | 24 |
| PAY 316 HB 20 | 16 | 10    | 5/8"   | G 3/4" -14   | 92,0       | 32 |
| PAY 320 HB    | 19 | 12    | 3/4"   | G 3/4" -14   | 92,0       | 32 |
| PAY 320 HB 25 | 19 | 12    | 3/4"   | G 1" -11     | 100,0      | 36 |
| PAY 325 HB    | 25 | 16    | 1"     | G 1" -11     | 100,0      | 36 |
| PAY 325 HB 32 | 25 | 16    | 1"     | G 1.1/4" -11 | 103,0      | 50 |
| PAY 332 HB 40 | 31 | 20    | 1.1/4" | G 1.1/2" -11 | 118,0      | 55 |