


# HK V1 501

## Geri Tepme Valfi V1501

**HANSA FLEX**

### Özellikler

|                 |  |
|-----------------|--|
| Model           | Koni kilidi                                    |
| Malzeme         | Mahafaza: Galvanize çelik<br>Çelik iç parçalar |
| Çalışma basıncı | maks. 350 bar                                  |

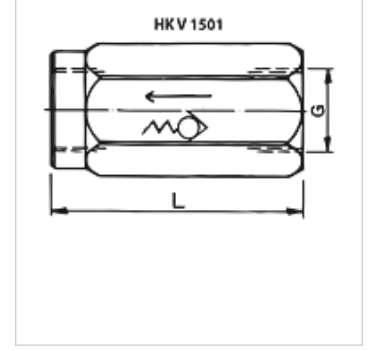

### Ürün

| Tanım          | p max.<br>(bar) | Açma basıncı<br>(bar) | Q max.<br>(L/min) | G        | L<br>(mm) | SW<br>(mm) | Ağırlık<br>(kg) |
|----------------|-----------------|-----------------------|-------------------|----------|-----------|------------|-----------------|
| HK V1 501 0004 | 350             | 0,5                   | 20                | G 1/4"   | 62        | 19         | 0,12            |
| HK V1 501 0006 | 350             | 0,5                   | 40                | G 3/8"   | 68        | 24         | 0,15            |
| HK V1 501 0008 | 350             | 0,5                   | 60                | G 1/2"   | 77        | 30         | 0,28            |
| HK V1 501 0012 | 300             | 0,5                   | 100               | G 3/4"   | 88        | 36         | 0,28            |
| HK V1 501 0016 | 300             | 0,5                   | 150               | G 1"     | 105       | 41         | 0,35            |
| HK V1 501 0020 | 250             | 0,5                   | 200               | G 1.1/4" | 127       | 55         | 0,40            |

SW = Anahtar genişliği