
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

Özellikler

Çalışma basıncı	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C)
Kavrama	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
Spiral hortum	Polyurethane

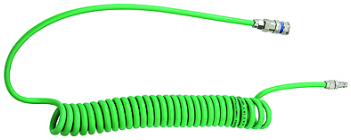

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Ürün

Tanım	Hortum ölçüsü	Ø spiral (mm)	Çalışma uzunluğu (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.