

# K-GRUNDEJEKTION SBP

Basic ejectors


**HANSA FLEX**

## Özellikler

<b>Özellikler</b>	Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%) No moving parts, which means no wear and no maintenance Maximum suction capacity with minimum compressed air consumption Minimum size, low weight For decentralised vacuum generation in highly dynamic processes
-------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Uygulama</b>	For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries. Also ideal for the construction of ejector blocks for decentralised control of suction pads.
-----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Gövde</b>	Plastic (impact-resistant)
<b>Bağlantı</b>	Push-in coupling
<b>Çalışma basıncı</b>	4.5 bar
<b>Tahliye derecesi</b>	85 %
<b>Susturucular</b>	Plastic

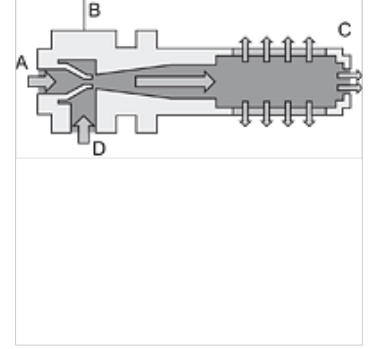

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Ürün

Tanım	Meme büyüklüğü	Basıncılı hava bağlantısı	Vakum bağlantısı	Hava tüketimi emme (L/min)	maks. emme kapasitesi (L/min)	Tip
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

## Aksesuar

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers