

# K-GRUNDEJEKTION SBP-C

Basic ejectors »SBP-C« with blow-off valve, with integrated silencer


**HANSA FLEX**

## Özellikler

Özellikler	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
------------	---

Uygulama	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. Construction of ejector blocks for centralised or decentralised individual control of suction pads.
----------	---

Meme sistemi	Brass
Bağlantı	Push-in coupling
Susturucular	Plastic
Temel cisim	Impact-resistant plastic

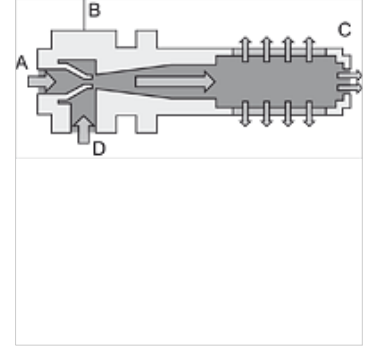

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Ürün

Tanım	Meme büyüklüğü	Emme valfi bekleme konumu	Basıncılı hava bağlantısı	Vakum bağlantısı	Tip
K- 07 45 01 19	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 21	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 23	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 25	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

## Aksesuar

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit