



# K-INLINE-EJEKTTÖREN VR

Inline ejectors »VR«, screw connection

**HANSA FLEX**

## Özellikler

<b>Özellikler</b>	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption low noise
<b>Uygulama</b>	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
<b>Gövde</b>	Aluminium eloxed (type VR)
<b>Meme sistemi</b>	Brass (type VR)
<b>Bağlantı</b>	Fiş bağlantısı

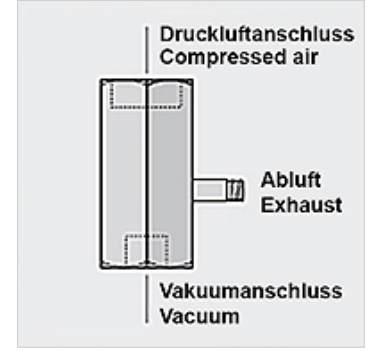

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

## Ürün

Tanım	Meme büyüklüğü	Atık hava bağlantısı	Basınçlı hava bağlantısı	Vakum bağlantısı	Tahliye derecesi	Hava tüketimi emme (L/min)	maks. emme kapasitesi (L/min)	Uzunluk (mm)	Çalışma basıncı (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0