


# K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

**HANSA FLEX**

## Özellikler

|                   |   |
|-------------------|---|
| <b>Özellikler</b> | Vacuum generator with integrated control valves and system monitoring functions<br>Gripping and blowing off can be controlled without the need for external valves<br>Optimised air consumption thanks to many models with differing suction capacities<br>Minimum energy costs in continuous operation<br>Easy adjustment with foil keypad, LED display of the settings<br>Minimum size and low weight<br>Optimum vacuum generation directly on the suction pad<br>Complete solution for very simple installation<br>Short learning curve thanks to "teach" function<br>No need for additional sensors<br>Easily visible status indication |
|-------------------|---|

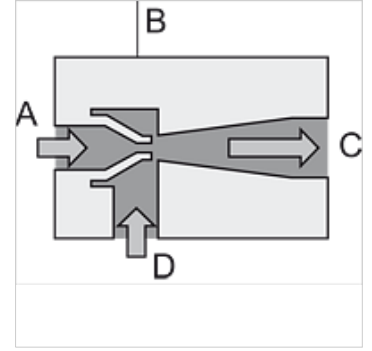

|                         |  |
|-------------------------|--|
| <b>Uygulama</b>         | Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes<br>pick-and-place systems |
| <b>Tahliye derecesi</b> | 85 %   |
| <b>Temel cisim</b>      | Anodised aluminium   |
| <b>Entegre olarak</b>   | NC blow-off valve, filter, silencer, non-return valve  |

## Açıklama

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Diğer bilgiler, istek üzerinedir.

## Açıklama

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Ek bilgiler

Important: Order two connection plugs per ejector.

## Ürün

| Tanım          | Meme büyüklüğü | Emme valfi bekleme konumu | Basınçlı hava bağlantısı | Vakum bağlantısı | Hava tüketimi emme (L/min) | maks. emme kapasitesi (L/min) | Tip                 | Çalışma basıncı (bar) |
|----------------|----------------|---------------------------|--------------------------|------------------|----------------------------|-------------------------------|---------------------|-----------------------|
| K- 07 45 01 46 | 1,0            | NC                        | M 5 IG                   | M5 female        | 46,0                       | 23,0                          | 65mm x 10mm x 107mm | 4,5                   |
| K- 07 45 01 45 | 1,0            | NO                        | M 5 IG                   | M5 female        | 46,0                       | 23,0                          | 65mm x 10mm x 107mm | 4,5                   |

## Aksesuar

|                             |                                     |
|-----------------------------|-------------------------------------|
| K-ANSCHLUSSSTECK MAGNETVE 1 | Connection plug for solenoid valves |
| K-ERSATZSCHALLDAEMPFER      | Replacement silencers               |
| K-ERSATZFILTERELEMENTE 1    | Replacement filter element          |