


K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

HANSA FLEX

Özellikler

Özellikler	Vacuum generator with integrated control valves and system monitoring functions Gripping and blowing off can be controlled without the need for external valves Optimised air consumption thanks to many models with differing suction capacities Minimum energy costs in continuous operation Easy adjustment with foil keypad, LED display of the settings Minimum size and low weight Optimum vacuum generation directly on the suction pad Complete solution for very simple installation Short learning curve thanks to "teach" function No need for additional sensors Easily visible status indication
-------------------	---

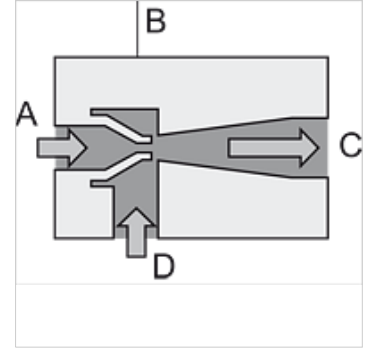

Uygulama	Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems
Tahliye derecesi	85 %
Temel cisim	Anodised aluminium
Entegre olarak	NC blow-off valve, filter, silencer, non-return valve

Açıklama

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Diğer bilgiler, istek üzerinedir.

Açıklama

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Ek bilgiler

Important: Order two connection plugs per ejector.

Ürün

Tanım	Meme büyüklüğü	Emme valfi bekleme konumu	Basınçlı hava bağlantısı	Vakum bağlantısı	Hava tüketimi emme (L/min)	maks. emme kapasitesi (L/min)	Tip	Çalışma basıncı (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

Aksesuar

K-ANSCHLUSSTECK MAGNETVE 1	Connection plug for solenoid valves
K-ERSATZSCHALLDAEMPFER	Replacement silencers
K-ERSATZFILTERELEMENTE 1	Replacement filter element