



# K-MUFFEN ABSPERRVENTIL VA

Female thread globe valves

**HANSA FLEX**

## Özellikler

|                      |                               |
|----------------------|-------------------------------|
| Çalışma basıncı      | max. 14 bar                   |
| Akışkan sıcaklığı    | max. +160 °C                  |
| Mahfaza, iç parçalar | Stainless Steel 1.4401/1.4408 |
| Conta                | FKM (FPM)                     |
| El çarkı             | Aluminium                     |

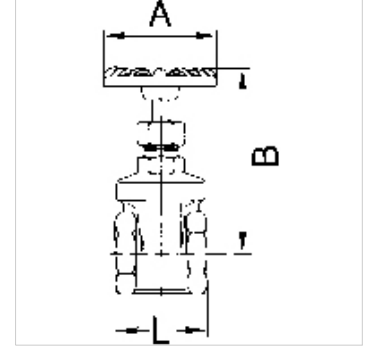

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Ürün

| Tanım          | DN | Mil     | A<br>(mm) | B kapalı | B açık | L<br>(mm) |
|----------------|----|---------|-----------|----------|--------|-----------|
| K- 07 30 22 16 | 10 | G 3/8   | 70,0      | 89       | 99     | 52,0      |
| K- 07 30 22 17 | 15 | G 1/2   | 70,0      | 89       | 99     | 52,0      |
| K- 07 30 22 18 | 20 | G 3/4   | 80,0      | 95       | 107    | 66,0      |
| K- 07 30 22 19 | 25 | G 1     | 80,0      | 102      | 118    | 76,0      |
| K- 07 30 22 20 | 32 | G 1 1/4 | 90,0      | 130      | 150    | 86,0      |
| K- 07 30 22 21 | 40 | G 1 1/2 | 90,0      | 132      | 142    | 94,0      |
| K- 07 30 22 22 | 50 | G 2     | 100,0     | 154      | 167    | 118,0     |