


# K-3 BKR STELLANTR E T MS

Brass ball valves, 3-way, with double-acting actuator, T-bore, normal position

**HANSA FLEX**

## Özellikler

|                      |   |
|----------------------|---|
| Model                | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback |
| Delme                | T-Form  |
| İşletim ısısı        | -20 °C to +70 °C  |
| Dönüş açısı          | 90 °  |
| Kumanda basıncı      | 5.5 bar   |
| Valf adaptörü        | Supplied as standard  |
| Tahrik               | aluminium eloxed  |
| Tahrik contası       | NBR   |
| Küresel vana         | Chrome-plated brass, with ISO-flange plate  |
| Küresel vana contası | PTFE/FKM  |

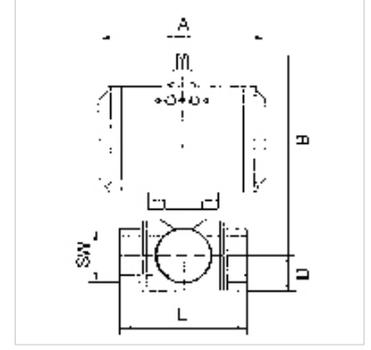

## Açıklama

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)  
Diğer bilgiler, istek üzerinedir.

## Açıklama

3-way cock, T-bore, full bore

## Ek bilgiler

Other T-positions on request

## Ürün

| Tanım          | DN | Mil      | Konum | PN (bar) | A (mm) | B (mm) | TR (mm) | L (mm) | SW (mm) |
|----------------|----|----------|-------|----------|--------|--------|---------|--------|---------|
| K- 07 30 03 17 | 15 | Rp 1/2   | T 3   | 40       | 133,0  | 142,0  | 20,0    | 64,5   | 25      |
| K- 07 30 03 18 | 20 | Rp 3/4   | T 3   | 40       | 133,0  | 146,0  | 24,0    | 76,0   | 31      |
| K- 07 30 03 19 | 25 | Rp 1     | T 3   | 40       | 133,0  | 150,5  | 30,0    | 97,0   | 41      |
| K- 07 30 03 20 | 32 | Rp 1 1/4 | T 3   | 40       | 161,0  | 191,5  | 37,0    | 118,0  | 55      |
| K- 07 30 03 21 | 40 | Rp 1 1/2 | T 3   | 25       | 180,0  | 193,5  | 43,0    | 133,0  | 55      |
| K- 07 30 03 22 | 50 | Rp 2     | T 3   | 25       | 209,0  | 221,0  | 56,0    | 157,0  | 67      |